




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>E02B 3/04</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/57376</b> (43) International Publication Date: 11 November 1999 (11.11.99)
(21) International Application Number: PCT/IT99/00115 (22) International Filing Date: 4 May 1999 (04.05.99) (30) Priority Data: RM98A000284      4 May 1998 (04.05.98)      IT (71)(72) Applicant and Inventor: GROSSI, Giorgio [IT/IT]; Via Del Mare, 3, I-00040 Pomezia (IT).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: A TECHNIQUE AND A DEVICE FOR BUILDING PROTECTIVE SEA WALLS OR ARTIFICIAL REEFS MADE OF MODULAR PARTS

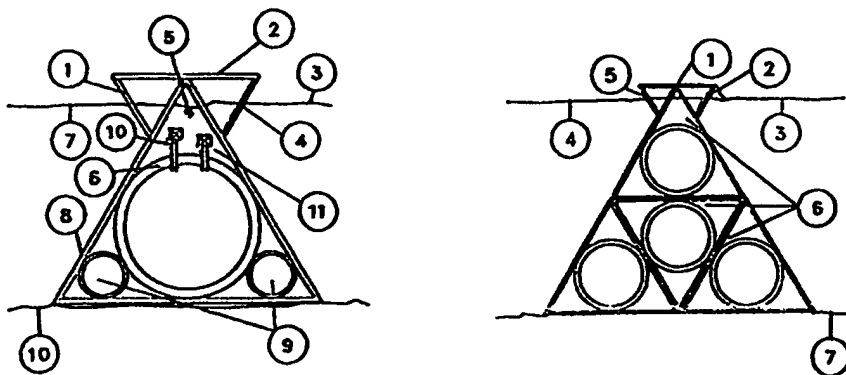

## (57) Abstract

This technique enables to build harbour structures such as breakwaters, protective sea walls or artificial reefs. These structures are modular and can be removed after their installation. This technique uses mostly cylinder-shaped solids (6) fitted in the structures which can be filled with water or emptied to sink or float. This enables to transport the structures by sea. Since the structures are modular, they can be joined together vertically and horizontally so that structures of almost any size can be built. One of the devices which can be built is a structure with a closed cylinder (6) made of concrete, with a steel network structure (8) around it. The entire structure is prism-shaped with a triangular base and has open or closed surfaces with panels. The modules are joined together by means of conventional systems. The use of conventional floats (9) guarantees maneuverability to the modules.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## DESCRIPTION

### A TECHNIQUE AND A DEVICE FOR BUILDING PROTECTIVE SEA WALLS OR ARTIFICIAL REEFS MADE OF MODULAR PARTS

The above mentioned invention concerns a technique which enables to build removeable harbours and artificial reefs, it also makes seaworthy those parts that form the protective sea walls and artificial reefs. Such structures are currently built of stone walls and reinforced concrete and for this reason they are fixed structures very expensive to construct. The existing removeable  
5 structures are floating ones and are composed of breakwaters, which are built using different systems, however none of them has the features of a conventional protective sea wall, in fact they can be placed where water is calm such as lakes and never in open sea. This technique enables to transport by sea the parts which form the installation, thus reducing production costs, in fact such structures are built in yards and then transported by sea to the points of installation. Since all  
10 parts are modular and already finished, less time is required to install this structure thus reducing costs. The modular parts which form the structure can float and be sunk the moment they are put in place; they can float again in case the structure has to be removed. This technique enables to build structures of almost any dimension such as breakwater dams, harbour protective sea walls, artificial reefs, driveways for lakes, long-distance power lines which can be submerged on  
15 seabeds and be inspected, practicable tunnels which can be also submerged on seabeds. This technique enables to build removable and reusable structures which are environmentally friendly, furthermore thanks to their particular shape they can shelter many sea species improving this way the quality of the sea environment. This technique enables to build structures which are not entirely closed so that water can flow in and flow out without stagnating in the basin. The  
20 technique consists of modular parts with a cylinder-shaped closed part in the middle (this cylinder-shaped part can be made of reinforced or prestressed concrete, iron or of several other compound materials). The cylinder-shaped part is fitted in a steel open network structure or in a part panelled structure according to the requirements. Such a structure forms triangular-shaped sections and a solid with two triangular sides and three rectangular sides with closed or open (only  
25 network structures) surfaces. The cylinder-shaped part in the network structure is watertight and thanks to valves it can be emptied so it can float or it can be filled with water or other liquids so that the module can sink. The empty areas between the network structure and the cylinder-shaped part or external to these are fitted with extra floats which increase the floating of the entire module

during transport by sea. Thanks to these extra floats the module can be rotated when it has to be placed. According to requirements the modules can have different dimension. Thanks to its particular shape the system has a great resistance and structures of almost any dimension can be built. Resistance and supporting surface are increased in proportion by the size of the system. The various modular parts of the system can be hooked together during transport by sea and towed to the point where they have to be positioned. The various parts which compose the system are anchored to the seabed by means of drilling or ballast. The levelling of the supporting area is carried out by means of tetrahedral shaped parts which are anchored to the seabed and joined to the knots of the network structure forming the modules. First are placed the anchor parts and the tetrahedral shaped (or other shaped parts) parts in order to level the supporting area of the seabed) after the modules are sunk and placed on the supports, they are then connected together so that the structure is completed. Thanks to the extra floats the modules can be put in position while submerged. The entire structure can be dismantled disconnecting one module at a time. It is possible to make the module float by pumping compressed air into the cylinder-shaped part so that water flows out of it. Rotation of the module and additional floating can be achieved by fitting extra floats. The valves fitted on the cylinder-shaped part for pumping air and filling it are of conventional type. The modules are prefabricated and can be used to build breakwater dams, harbour protective sea walls, wharfs, artificial reefs and also driveways for lakes or for water reservoirs subject to flooding. This technique enables also to build cable lines or long distance power lines or practicable tunnels on seabeds. In this case to the modules are added three closed cylinders (made of reinforced or prestressed concrete, of steel or of compound materials) which are fitted in the three vertexes of the triangle. The cylinders can be filled with air or water and be emptied again if the module has to be transported, sunk, placed or demounted and transported again. In case that cable lines, long-distance power lines or practicable tunnels resting on seabeds have to be built with the technique, the core in the middle (made of reinforced or prestressed concrete, of steel or other compound materials) is also cylinder-shaped with basements that enable to insert a cylinder of one module into another one, the basements are open and can be joined together by a male-female connecting system. This system has a conventional watertight and pressure seal system (gaskets and seals), parts of this system are connected together by bolts or by other conventional systems. The following passage is a further description of the invention in its industrial form, there is a reference to illustrations of some shapes that can be built using the technique of the invention:

Illustration 1: This illustration shows the device in section. The drawing shows in particular the cylinder 6, the contour of the network structure 8, the conventional extra floats 9 which are inserted in the vertexes and can be also inserted in the area of the vertex 5, the line of the seabed 10, the

waterline 7 and 3. The closed cylinder 6 is fitted with conventional valves 10, that enable to fill it  
65 with water. Once filled with water the module can float sink and rest on the seabed 10. The floats  
9 are fitted with conventional systems that enable it be deflated or filled with water. In this  
illustration one can see the walkway 2 supported by the structure 1, since only one modular part  
is enough to reach the waterline 3 and 7. If the wave motion comes from the side of waterline 3  
towards direction 3-7, this motion is diminished by the bulkhead 4, wich splits up the wave motion  
70 between the bulkhead and the surface of the cylinder 6. This module is linked to the seabed 10 by  
means of conventional systems which are fitted on the vertexes of the network structure. The  
device can be disconnected from the seabed. In fact once that the structure has been set free by  
the restraints fitted at the vertexes on the seabed 10, by pumping air into the valves of  
conventional type 10 water flows out from the valves of conventional type 11. At this point the  
75 structure can float and be towed away from the installation point.

Illustration 2: This illustration shows a side view of the device. The drawing shows the closed  
cylinder 4, the network structure 3, the bulkead 1 and the network structure of the walkway 2.  
This illustration is a side view of the device that is showed in illustration 1. The device is not fitted  
with the walkways described in illustration 1 and 2 if the modules are positioned under waterline.

80 Illustration 3: This illustration shows in section several modules joined together. The drawing  
shows in particular the seabed 7, the waterline 3 and 4, the structure of the walkway 1, the  
bulkhead 2 which interrupts the motion coming from the waterline 3 and the empty areas 6 which  
enable water to recirculate in the area of the waterline 4 that is protected by the wave motion.  
This picture shows how the device can be used when water is deeper than the height of a single  
85 module.

Illustration 4: This illustration shows (in section) the device as in illustration 3 and how it can be  
used when water is deeper than in illustration 3 and wave motion is very strong. The wave motion  
moves from waterline 2 to waterline 3 and it is deflected by the bulkhead 1 towards the cylinders  
positioned in the bottom. The illustration shows the tetrahedral-shaped supports 4 of the structure  
90 which are fixed to the seabed by means of conventional system and are placed exactly at the  
vertexes of the network structure. These tetrahedral-shaped supports can be of different size and  
be used if it is necessary to level the seabed to the above waterline. In case of sandy seabeds  
these supports are much bigger because a sizeable part of them has to be buried in order to  
guarantee fastening to them and the structure. In case of rocky seabeds these supports are fixed  
95 to the stone by means of conventional systems. If one module is joined lengthwise together to  
another one or to several other ones, it is possible to build structures of almost any length. In this  
case the modules are first joined together with the vertex bases that coincide with the vertexes of  
the tetrahedral-shaped parts 4 and then all the other modules in height and in width.

100 Illustration 5: This illustration shows in section the floats 3 of the device. These floats are made by means of conventional systems and enable to stabilize the module when it is floating or during transport. They enable also to rotate the module in the direction 1-2 when it is submerged in order to maximize maneuverability when it has to be put in place. The illustration shows also the cylinder 5, the network structure 6 and the waterline 4.

105 Illustration 6: This illustration fits the description of illustration 1. The difference is the network structure 3 which is square-shaped in section. This illustration shows in section the closed cylinder 1, the waterlines 2 and 4, the bulkhead 6 and the seabed 5.

Illustration 7: This illustration shows triangular-shaped and square-shaped modules joined together to form the device. It also shows the waterlines 1-2 and the seabed 3.

110 Illustration 8: In this illustration the cylinder 5 is not filled with water so it can sink, but it is watertight. This enables to build inside the cylinder practicable tunnels or cable lines. The module can be sunk or float by means of the closed cylinders 2 and by conventional systems of water filling and emptying. In such a case the module rests or it is fastened to the seabed 6 and lies under the waterline 7. The contour structure is network-shaped and is made of steel like the above mentioned structures.

115 The closed or open cylinders can be made of reinforced or pressed concrete, of steel or of compound materials like the above mentioned devices. Rotation of the module can be obtained as described in illustration 5.

Illustration 9: This illustration shows a side view of the end parts of a module inserted in another one so that cylinder 8 is continuous.

120 This illustration shows the male joints 9 for the cylinder 8 and the female joints 10 for the cylinder 11. If the module is moved in direction 7 then the cylinder 7 fits in by means of the joints 9 and 10 to the cylinder 11. The joints 9 and 10 are sealed with conventional gaskets and sealing materials. The connection of several modules enables to build structures of almost any length.

Claims

1. A technique which enables to build protective sea walls, breakwater dams, artificial reefs by means of floating and seaworthy structures. The structures are put in place by sinking them, they can be removed, float again and reused.
- 5 2. A technique in conformity with claiming 1. The hallmark of this technique is that it enables to sink or float the structure by filling or emptying a solid body with water
3. A technique in conformity with claimings 1 and 2. The hallmark of this technique is that the floating solid body is closed and cylinder-shaped or closed, prism-shaped with a polygonal  
10 base.
4. A technique in conformity with claimings 1-2 and 3. The hallmark of this technique is that it enables also to build submerged long-distance power lines, cable lines or tunnels which can be placed on seabeds.  
15
5. A technique in conformity with claimings 1-2-3 and 4. The hallmark of this technique is that it enables to join several modules. The structure enables to regulate the flow of the sea currents by removing or adding the cylinder-shaped parts fitted in the modules.
- 20 6. A technique in conformity with claimings 1-2-3-4 and 5. The hallmark of this technique is that the modules are joined together and the cylinder-shaped parts are not filled with water. This enables to build floating walkways.
7. A technique in conformity with claimings 1 to 6. What distinguishes this technique is the fact  
25 during the construction of the floating wharfs the cylinders fitted in the modules can be partially filled with water. This enables to raise or sink the waterline of the wharfs and ballast them.
8. A device in conformity with claiming from 1 to 7. The conventional valves fitted on the closed  
30 cylinder-shaped tank, which enable to fill with water or empty it, distinguish this device.
9. A device in conformity with claiming 8. The contour network-shaped structure of the cylinder

made of steel or other conventional materials distinguishes this device.

35 10. A device in conformity with claiming 9. The possibility that a great number of modules can be joined together in length and vertically distinguishes this device.

40 11. A device in conformity with claimings from 1 to 10. What distinguishes this device is the central core of the structure, in fact it is not cylinder-shape, but a solid with a triangular or a square or a polygonal base.

12. A device in conformity with claimings from 1 to 11. The hallmark of this device is that the modules can be joined together by means of bolts, bands and other conventional systems.






45 13. A device in conformity with claimings from 1 to 12. The hallmark of this device is that modules which have different shapes and dimension can be joined together.

14. A device in conformity with claimings from 1 to 13. The rotation of module in water achieved by means of conventional floats distinguishes this device.

50 15. A device in conformity with claimings from 1 to 14. The hallmark of this device is that the modules are seaworthy, can be joined together and towed to the position where they have to be sunk and placed.

55 16. A device in conformity with claimings from 1 to 15. The presence of empty areas in the structure distinguishes this device. Thanks to these areas, in the basin that is marked by the structure, water can circulate and not stagnate.

1/2

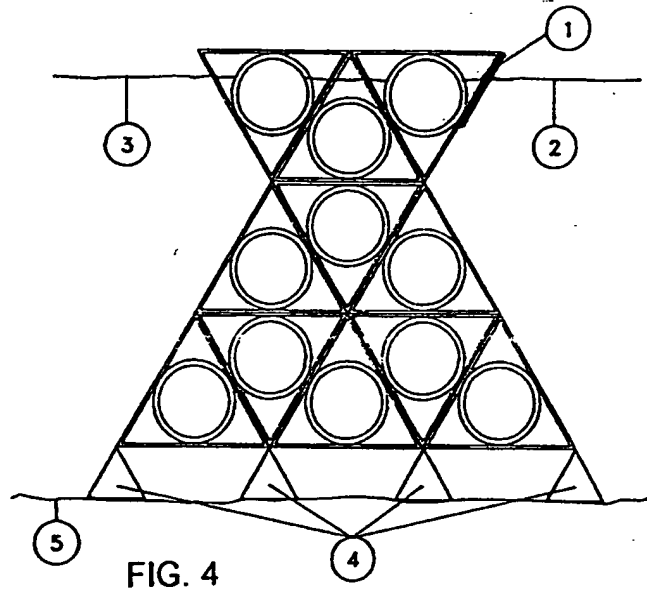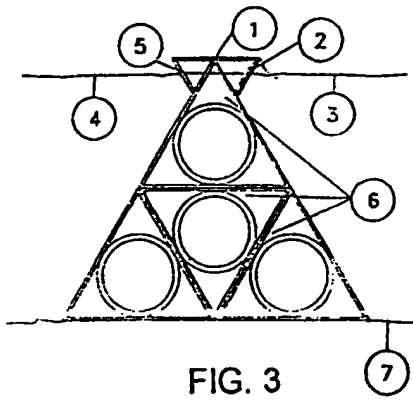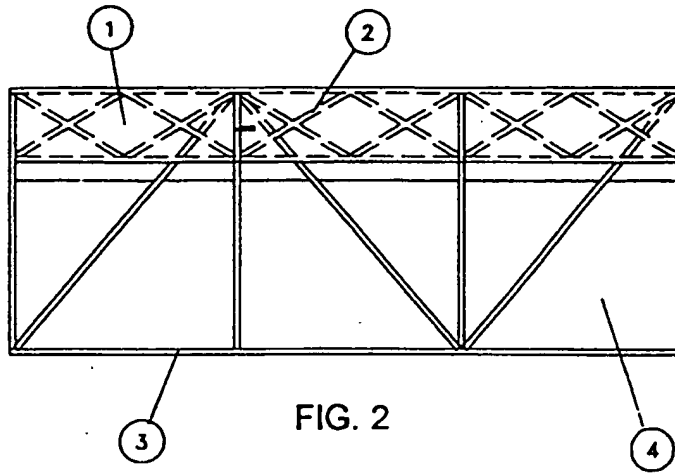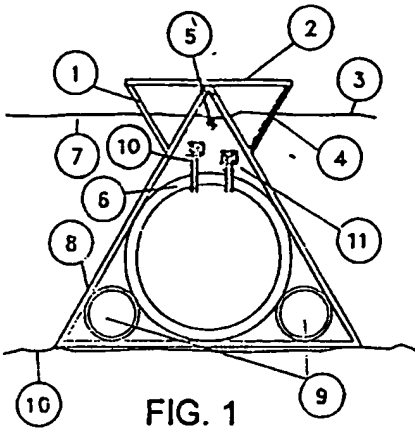

2/2

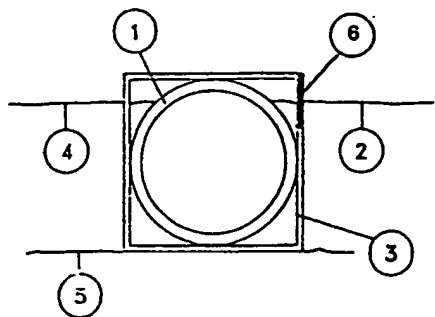


FIG. 6

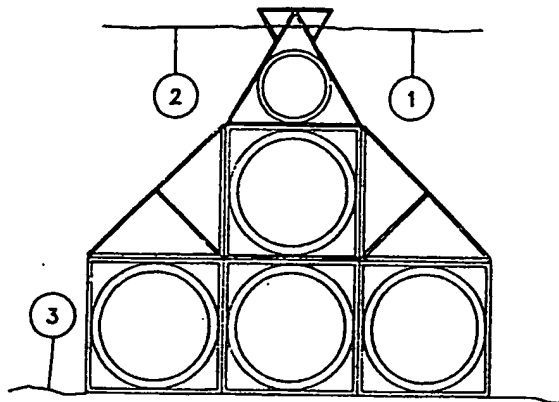


FIG. 7

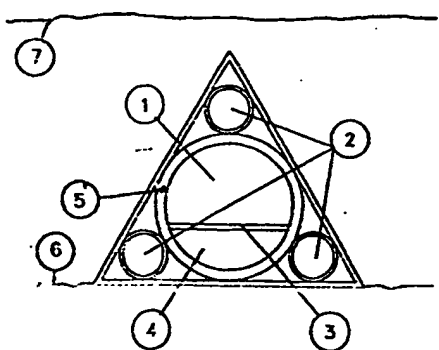


FIG. 8

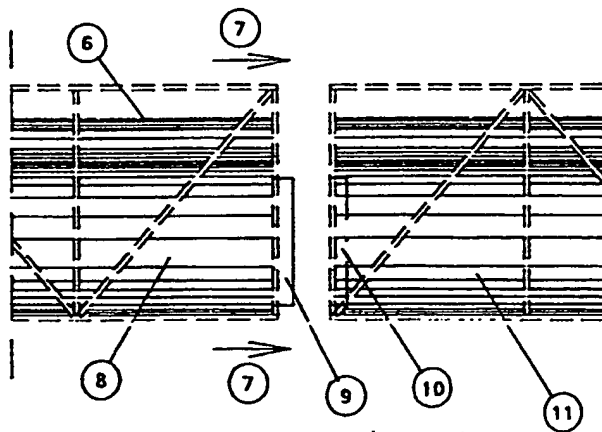


FIG. 9

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 99/00115

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 E02B3/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 E02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 061 122 A (CHATTEY NIGEL) 29 October 1991 (1991-10-29)  column 4, line 3 - line 20 column 6, line 12 - line 60 column 7, line 55 - column 8, line 8; figures 2,5,6  ---	1-3  5,8,9, 11-13,15
A	US 4 979 453 A (SLOAN STEPHEN ET AL) 25 December 1990 (1990-12-25) column 2, line 61 - column 3, line 21 column 3, line 59 - column 4, line 5 figures 3,10A  ---  -/--	3,6-9, 12,16



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

8 September 1999

Date of mailing of the international search report

16/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Urbahn, S

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 99/00115

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	BE 637 175 A (S.E.G.A.N.S.) 31 December 1963 (1963-12-31) page 2, line 3 - line 27 figure 1	4
A	US 4 074 497 A (ONO TAISABURO) 21 February 1978 (1978-02-21) column 2, line 14 - line 39 figures 3,5	5,9,10, 12,13,16
A	US 1 846 278 A (ROANE ROBERT ROYAL) 23 February 1932 (1932-02-23) figure 3	6,9,12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 99/00115

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5061122 A	29-10-1991	EP 0474434 A JP 5156618 A US 5823714 A	11-03-1992 22-06-1993 20-10-1998
US 4979453 A	25-12-1990	CN 1043911 A, B JP 2046429 C JP 2189298 A JP 7064309 B	18-07-1990 25-04-1996 25-07-1990 12-07-1995
BE 637175 A		NONE	
US 4074497 A	21-02-1978	NONE	
US 1846278 A	23-02-1932	NONE	